

HiFLOW

the smart water solution

filtered



UNIQUE
In-Line Mains
Water Filter
System

HiFLOW



*In-Line Mains
Water Filter System*

Inline water filter - connects to your existing tap.

Introducing a new innovation in filtered water.
The HiFlow water filter system is easy to install,
connecting directly to any mixer tap.

www.hiflowfilter.com.au

Turn any tap into a filter tap.

Introducing a new innovation in filtered water. The HiFlow water filter system is a revolution to the filtered water industry. The system is easy to install, connecting directly to any mixer tap or cold water tap. This allows you to enjoy your own great tasting, clear, freshly filtered water any time.

The Practical Solution

At only one cent per litre, the HiFlow system is less expensive per glass than bottled water and more environmentally friendly. The cartridge only requires replacing once a year* and is easy to change.

The Convenient Solution

It is space saving, mounting vertically or horizontally under your kitchen sink meaning there is no need for a separate tap. This is particularly good news for those with granite or stone benchtops or under mount sinks. And why would you use a freestanding filter unit anymore? The kitchen tap will do the same thing and free up valuable bench space.


The Healthy Solution

With half micron filtration you really can bottle your own filtered water. Enjoy it not only for drinking but for washing fruit and vegetables and in food preparation including baby formulas. The HiFlow not only removes bad taste and odour but is certified to remove/reduce contaminants including Lead, Cysts, Giardia, Cryptosporidium and Chlorine. The filter system inhibits limescale buildup in water using appliances but does not remove fluoride and healthy natural minerals and salts.

The Logical Solution

As the name suggests, it's fast flowing at 8.3 litres per minute* which is the same as your current mains water pressure and comes with a 5 year warranty.

So now you can have your own supply of filtered water literally on tap.

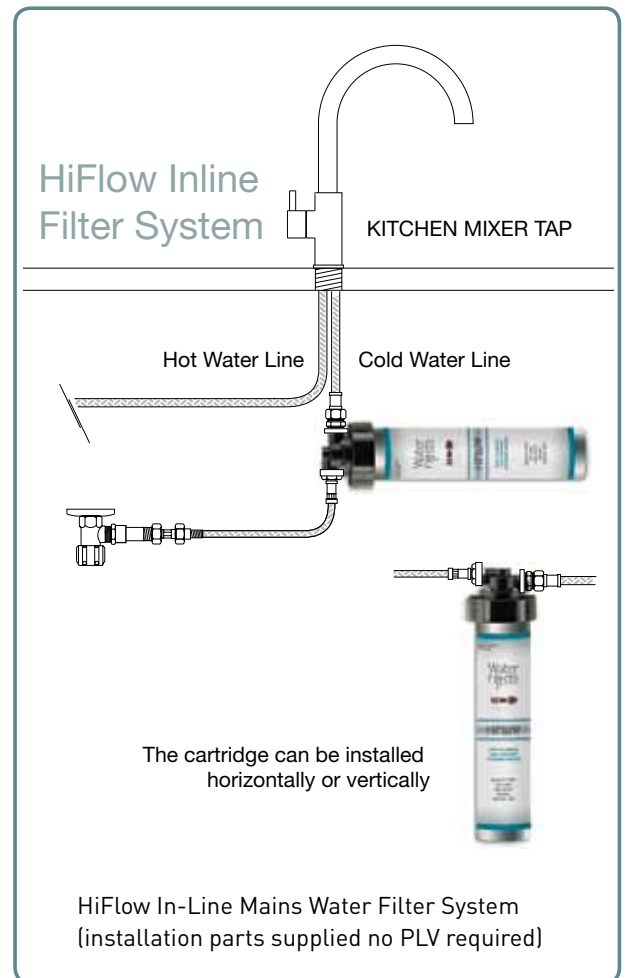

The Specifications

- Capacity: 11,355 litres*
- Pressure: 70-860 kPa
- Temperature: 2-38%
- Flow Rate: 8.3 litres per minute*
- Micron: 0.5 (half micron)

The HiFlow Installation Kit

- WFA QL-2 Filter Head Assembly
- WFA HiFlow Filter Cartridge
- Mounting Screws
- Dual Check Valve
- Chrome Hex Adaptor 1/2" to 1/2"
- Braided Pex Hose 550mm
- Brass Nipple 3/8" to 1/2"
- Horizontal Stabilising Bracket
- Filter Monitor Alarm
- Plumbing Tape

* Cartridge life and performance is subject to water quality, usage, water pressure and flow rate.

visit www.hiflowfilter.com.au to find your nearest stockist

Up to \$3 from every HiFlow sold is donated to Clean Up Our Climate, an initiative of Clean Up Australia.

