


Kinetico 2060s



System Components

| | |
|---------------------------------|--------------------------------------|
| Media Vessel (qty) Size | (2) 203 x 1,016 mm |
| Media Vessel Construction | Wrapped Polyethylene |
| Empty Bed Volume | 29.5 liters |
| Media Type | Non Solvent Cation Resin |
| Media Volume | 19.8 liters |
| Bed Depth | 610 mm |
| Free Board | 406 mm |
| Riser Tube | 25 mm ABS |
| Distributor Upper | 0.36 mm Slots, ABS Basket |
| Lower | 0.36 mm Slots, ABS Basket |
| Under bedding | None |
| Regeneration Control | Non-electric Use Meter |
| Regeneration Type | Countercurrent |
| Meter Type | 1.1 – 94.6 lpm Polypropylene Turbine |

Inlet Water Quality

| | |
|--|--------------------------------|
| Pressure Range | 1.0 – 8.6 bar Dynamic Pressure |
| Temperature Range | 2 – 50° C |
| pH Range | 5 – 10 SU |
| Free Chlorine Cl ₂ (Max.) | 2.0 mg/l |
| Hardness as CaCO ₃ (Max.) | 1,129 mg/l |

Operating Specs

| | |
|---|----------------------|
| Flow Range (1-2 Δ bar) | 43.5 – 68.1 lpm |
| Flow Configuration | Alternating |
| Dimensions (width x depth x height) | 432 x 203 x 1,168 mm |
| Weight (Operating / Shipping) | 91 / 64 kg |

Connections

| | |
|----------------------------------|---------------------------|
| Inlet / Outlet Connections | Custom Adapter and E-Clip |
| Drain Connection | 0.5" Tube |
| Brine Line Connection | 0.375" Tube |
| Power | None |

System Part Numbers

| | |
|---|-------|
| Kinetico 2060s, 18 x 35 brine drum | 11006 |
| Kinetico 2060s, no brine drum | 11007 |
| Kinetico 2060s, no resin, no brine drum | 11199 |

Brine Tank Options

| | | | | |
|------------------------------|--------------|-----------|-----------|-----------|
| Tank Description | 12 x 16 x 20 | 12 x 40 | K Spray | 18 x 35 |
| Brine Tank Part Number | 7202 | 1479B | 9763A | 7938 |
| Tank Height | 51 cm | 102 cm | 89 cm | 89 cm |
| Tank Footprint | 30 x 41 cm | 30 cm DIA | 46 cm DIA | 46 cm DIA |
| Material | HDPE | HDPE | HDPE | HDPE |
| Salt Capacity | 23 kg | 45 kg | 91 kg | 114 kg |



Regeneration Specifications

| | |
|---------------------------------|------------|
| Regeneration Volume | 132 liters |
| Regeneration Time | 45 minutes |
| Backwash Flow Control | 7.6 lpm |
| Brine Refill Flow Control | 1.5 lpm |

| Setting | Capacity | Efficiency | Dosing | Meter Disc |
|----------|-------------|--------------|-----------|------------|
| **1.2 kg | 808 grams | 660 grams/kg | 0.06 kg/l | |
| 1.6 kg | 947 grams | 580 grams/kg | 0.08 kg/l | |
| **1.8 kg | 1,023 grams | 564 grams/kg | 0.09 kg/l | |
| 2.0 kg | 1,076 grams | 539 grams/kg | 0.10 kg/l | |

Liters/Regeneration:

** Settings certified by NSF and or WQA

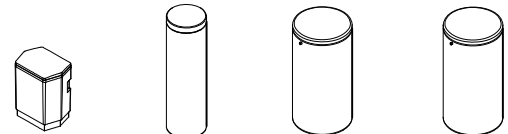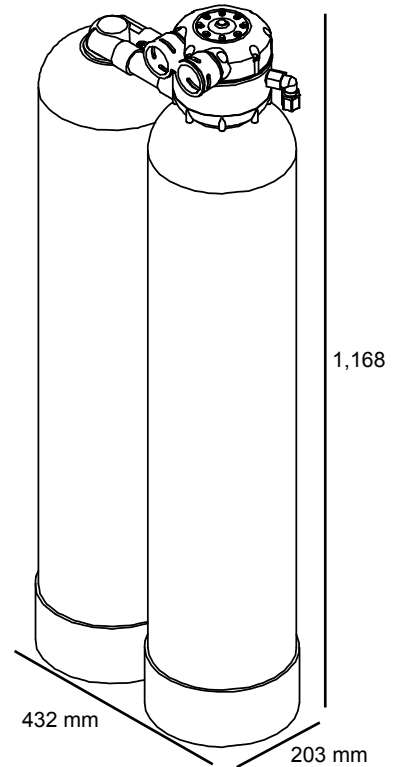

Disc Selection

(Compensated Hardness*)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 |
|-------|-------|-------|-------|-----|-----|-------|-------|
| 137 | 257 | 376 | 479 | 581 | 684 | 770 | 855 |
| 154 | 308 | 462 | 581 | 701 | 821 | 923 | 1,026 |
| 171 | 325 | 479 | 616 | 752 | 872 | 975 | 1,077 |
| 188 | 342 | 496 | 650 | 787 | 906 | 1,026 | 1,129 |
| 4,743 | 2,372 | 1,581 | 1,186 | 949 | 791 | 678 | 593 |

*Compensated hardness in mg/l = Hardness + (51 x Fe in mg/l)

Operating Profile

Softener shall remove hardness to less than 8 mg/l when operated in accordance with the operating instructions. The system shall include two tanks. This duplex configuration shall operate with one tank on-line during service. During regeneration cycles, one tank shall provide water to service and to the regenerating tank. A water meter shall initiate system regeneration. The water meter shall measure the processed volume and be adjustable. Service flow shall be down-flow and regeneration flow shall be up-flow.

Regeneration Control Valve

The regeneration control valve shall be top mounted (top of media tank), and manufactured from non-corrosive materials. Control valve shall not weigh more than four pounds. Control valve shall provide service and regeneration control for two media tanks. Inlet and outlet ports shall accept a quick connect, double o-ring sealed adapter. Interconnection between tanks shall be made through the regeneration valve with a quick connect adapter. Control valve shall operate using a minimum inlet pressure of 1 bar. Pressure shall be used to drive all valve functions. No electric hook-up shall be required. Control valve shall incorporate four operational cycles including; service, brine draw, slow rinse, and a combined fast rinse and brine refill. Service cycle shall operate in an up-flow direction. The brine cycle shall flow down-flow, opposite the service flow, providing a countercurrent regeneration. Control valve shall contain a fixed orifice eductor nozzle and self-adjusting backwash flow control. The control valve will prevent the bypass of hard water to service during the regeneration cycle.

Media Tanks

The tanks shall be designed for a maximum working pressure of 8.6 bar and hydrostatically tested at 20.7 bar. Tanks shall be made of engineered plastic with a 2.5 in. threaded top opening. Each tank shall be NSF approved. Upper distribution system shall be of a slot design. Lower distribution system shall be of a flat plate design. Distributors will provide even flow of regeneration water and the collection of processed water.

Conditioning Media

Each softener shall include non-solvent cation resin having a minimum exchange capacity of 68.6 grams of CaCO₃ per liter of resin when regenerated with 0.24 kg of salt per liter of resin. The media shall be solid, of a proper particle size and shall contain no plates, shells, agglomerates or other shapes, which might interfere with the normal function of the water softener.

Brine System

A combination salt storage and brine production tank shall be manufactured of corrosion resistant, plastic. The brine tank shall have a chamber to house the brine valve assembly. The brine float assembly shall allow for adjustable salt settings and shall provide for a shut-off to the brine refill. The brine tank shall include a safety overflow connection to be plumbed to a suitable drain.